

The Click & Pro System

Application

DEVIdry™ Pro Kit is what makes DEVIdry™ to the Click & Pro System.

By choosing DEVIdry™ Click & Pro, you get the truly professional finish with inconspicuously placed timer thermostat.

The timer thermostat takes full advantage of the quick responding floor heat of DEVIdry™.

DEVIdry™ Pro Kit

DEVIdry™ Pro Kit is the professional kit, which includes DEVI's digital DEVIreg™ 535 timer-thermostat.

The digital timer thermostat has a simple 4 event timer, covering 3 programs.

With a DEVIreg™ 535 timer-thermostat you can save on energy while still having the perfect heating comfort.

The thermostat has a built-in monitoring circuit, which will switch off the heating if the sensor is disconnected or short-circuited.

Connecting the DEVIreg™ 535 require an authorised installer.

Product Features

Digital timer thermostat

Low standby consumption
max. 0.30W

Childproof function

15A equals <34,5 m² at 100 W/m²

Light indication (LED)

Standard compliance

IEC 60335-2-96 (with DEVIdry™)

EN/IEC 60730

Note:

Using a laminate top floor requires a minimum thickness / quality of 8 mm HDF (>800 kg / m³).

Technical details


| | |
|-------------------------------------|--------------------------------|
| Set point Range | +5°C-35°C |
| Operation voltage | 180-250 VAC, 50/60 Hz |
| Standby power consumption | Max. 0.30 W |
| Relay: | |
| Resistive load | 230V ~ 15A / 3450W |
| Inductive load | cos φ = 0.3 Max. 1A |
| Hysteresis ± 0.2°C with room sensor | ± 0.4°C with floor sensor only |
| Ambient temperature | -10° to +30°C |
| Temperature range | 5-35°C |
| IP class | 31 |
| Dimensions (H/W/D) | 86x36x53 mm |

DEVIdry™ Pro Kit

| | | |
|------------------|--|---|
| 19911006 | DEVIdry™ Pro Kit | With DEVlreg™ 535 timer, ELKO |
| 19911007 | DEVIdry™ Pro Kit | With DEVlreg™ 535 timer, ELJO |
| 19911008 | DEVIdry™ Pro Kit | With DEVlreg™ 535 timer, JUSSI |
| The kit contains | DEVlreg™ 535 Floor sensor Connection Tool Aluminium tape Supply cord | Timer-thermostat, flush mounted, 15A 3m NTC 15 kOhm at 25° C For connecting DEVIdry™ elements For fixing sensor 3 m, 1 mm ² , max. 10A Installations >10A require extra supply cord |

Accessories

| | | |
|----------|-------------|-----------------------------------|
| 19911009 | Supply cord | 3 m, 1 mm ² , max. 10A |
|----------|-------------|-----------------------------------|

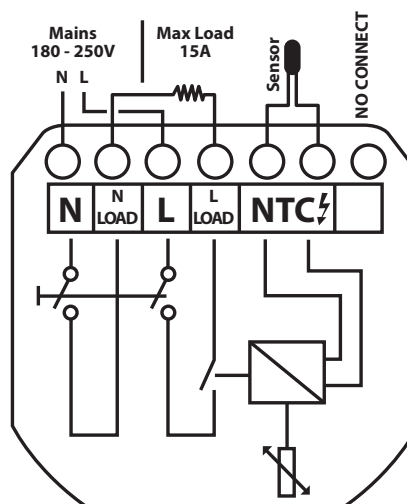

DEVI A/S

Ulvehavevej 61
DK-7100 Vejle
Tel: +45 7642 4700
Fax: +45 7642 4701
www.devi.com

DEVI® 